

Outdoor housings

for flat panels

The Audipack outdoor housings

The Audipack outdoor solutions finish and protects flat panels in outdoor applications



Audipack®

It's great to have solutions...

Flat panels in open areas, and public places



Flat panels being used more often for media systems in public spaces and outside areas, and need to be protected against the climate and vandalism. Audipack's flat panel housings enclose the panel in a sturdy, durable and easy to mount metal housing with a safety glass front.

The front of the housing is locked, opened with a unique key for maintenance and installation. Available with standard or custom built mounting accessories.

The standard outdoor housings are equipped with:

- thermostatically controlled ventilation and heating system
- safety glass
- replaceable filters

The standard active ventilation and heating system reduces condensation inside the housing, with Ip rating IP55.

The high brightness outdoor housings are equipped with:

- thermostatically controlled ventilation and heating system
- safety glass
- airconditioning (needed for high brightness screens)

Ip rating IP55.

Portrait and landscape position housing are available as standard, for any screen size.

- ▲ **Suitable for any brand and type of flat panel**
- ▲ **Very easy installation**
- ▲ **Easy equipment and flat panel access**
- ▲ **Available in Any RAL colour and finishing**
- ▲ **Landscape and portrait models available**



(FSMO-70) The flat panel is very easy accessible



High level finishing



Easy access after unlocking the glass front



Optional available in any RAL colour

OUTDOOR HOUSINGS

OUTDOOR HOUSINGS

Max. brightness: **700 cd/m²**
 Max. surrounding temp. **-20°C to +30°C***

Optional: non-reflective glass bezel
Standard colour black RAL 9005
Suitable for shady environments



IP 55



	Landscape	Portrait	
Ref.	FSMO-32	FSMO-32P	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	32
Mounting interface	L&S 5	L&S 5	
Max. screen size	W800 x D110 x H500	W500 x D150 x H800	
Ref.	FSMO-40	FSMO-40P	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	40
Mounting interface	L&S 5	L&S 5	
Max. screen size	W990 x D150 x H 600	W600 x D150 x H990	
Ref.	FSMO-42	FSMO-42P	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	42
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1035 x D150 x H630	W630 x D150 x H1035	
Ref.	FSMO-46	FSMO-46P	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	46
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1120 x D150 x H675	W675 x D150 x H1120	
Ref.	FSMO-47	FSMO-47P	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	47
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1145 x D150 x H690	W690 x D150 x H1145	
Ref.	FSMO-49	FSMO-49P	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	49
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1175 x D150 x H705	W705 x D150 x H1175	
Ref.	FSMO-50	FSMO-50P	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	50
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1205 x D150 x H725	W725 x D150 x H1205	
Ref.	FSMO-55	FSMO-55P	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	55
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1320 x D150 x H785	W785 x D150 x H1320	
Ref.	FSMO-60	FSMO-60P	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	60
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1435 x D150 x H855	W855 x D150 x H1435	
Ref.	FSMO-65	FSMO-65P	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	65
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1535 x D150 x H910	W910 x D150 x H1535	
Ref.	FSMO-70	FSMO-70P	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	70
Mounting interface	Vesa 400 & L&S 5	Vesa 400 & L&S 5	
Max. screen size	W1645 x D115/145 x H975	W975 x D115/145 x H1645	
Ref.	FSMO-72	FSMO-72P	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	72
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1695 x D115/145 x H1000	W1000 x D 15/145 x H1695	
Ref.	FSMO-75	FSMO-75P	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	75
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1750 x D115/145 x H1030	W1030 x D115/145 x H1750	
Ref.	FSMO-80	FSMO-80P	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	80
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1875 x D115/145 x H1100	W1100 x D115/145 x H1875	
Ref.	FSMO-85	FSMO-85P	Max. °"
Colour	Black bezel, white housing	Black bezel, white housing	85
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1985 x D115/145 x H1160	W1160 x D115/145 x H1985	

*The housing is intended to use the surrounding air for ventilation; the surrounding air may not exceed the allowed working temperature of the flat panel.

OUTDOOR HOUSINGS

Slim-line OUTDOOR HOUSINGS

For screens up to 75 mm. depth

Max. brightness: **700 cd/m²**Max. surrounding temp. **-20°C to +30°C***Optional: non-reflective glass bezel
Standard colour black RAL 9005

Suitable for shady environments

**IP 55**

	Landscape	Portrait	
Ref.	FSMO-32S	FSMO-32SP	Max. " 32
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 800 x D 75 x H 500	W 500 x D 75 x H 800	
Ref.	FSMO-40S	FSMO-40SP	Max. " 40
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 990 x D 75 x H 600	W 600 x D 75 x H 990	
Ref.	FSMO-42S	FSMO-42SP	Max. " 42
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1035 x D 75 x H 630	W 630 x D 75 x H 1035	
Ref.	FSMO-46S	FSMO-46SP	Max. " 46
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1120 x D 75 x H 675	W 675 x D 75 x H 1120	
Ref.	FSMO-47S	FSMO-47SP	Max. " 47
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1145 x D 75 x H 690	W 690 x D 75 x H 1145	
Ref.	FSMO-49S	FSMO-49SP	Max. " 49
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1200 x D 75 x H 710	W 710 x D 75 x H 1200	
Ref.	FSMO-50S	FSMO-50SP	Max. " 50
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1210 x D 75 x H 725	W 725 x D 75 x H 1210	
Ref.	FSMO-55S	FSMO-55SP	Max. " 55
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1320 x D 75 x H 785	W 785 x D 75 x H 1320	
Ref.	FSMO-60S	FSMO-60SP	Max. " 60
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1435 x D 75 x H 855	W 855 x D 75 x H 1435	
Ref.	FSMO-65S	FSMO-65SP	Max. " 65
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1535 x D 75 x H 910	W 910 x D 75 x H 1535	



OUTDOOR HOUSINGS FOR 2000 NIT AND MORE LANDSCAPE

PORTRAIT

Brightness: 2000 cd/m² and more**IP 65**

Max. surrounding temp. -20°C to +30°C



Suitable for full sunlight



Ref.	FSMO-46HBV	FSMO-46HBVP	Max. "
Colour	Black bezel, white housing	Black bezel, white housing	46
Screen orientation	Landscape	Portrait	
Power supply	230 VAC 50-60 Hz	230 VAC 50-60 Hz	
Ref.	FSMO-47HBV*	FSMO-47HBVP*	Max. "
Colour	Black bezel, white housing	Black bezel, white housing	47
Screen orientation	Landscape	Portrait	
Power supply	230 VAC 50-60 Hz	230 VAC 50-60 Hz	
Ref.	FSMO-49HBV*	FSMO-49HBVP*	Max. "
Colour	Black bezel, white housing	Black bezel, white housing	49
Screen orientation	Landscape	Portrait	
Power supply	230 VAC 50-60 Hz	230 VAC 50-60 Hz	
Ref.	FSMO-55HBV*	FSMO-55HBVP*	Max. "
Colour	Black bezel, white housing	Black bezel, white housing	55
Screen orientation	Landscape	Portrait	
Power supply	230 VAC 50-60 Hz	230 VAC 50-60 Hz	
Ref.	FSMO-60HBV*	FSMO-60HBVP*	Max. "
Colour	Black bezel, white housing	Black bezel, white housing	60
Screen orientation	Landscape	Portrait	
Power supply	230 VAC 50-60 Hz	230 VAC 50-60 Hz	
Ref.	FSMO-65HBV*	FSMO-65HBVP*	Max. "
Colour	Black bezel, white housing	Black bezel, white housing	65
Screen orientation	Landscape	Portrait	
Power supply	230 VAC 50-60 Hz	230 VAC 50-60 Hz	
Ref.	FSMO-72HBV*	FSMO-72HBVP*	Max. "
Colour	Black bezel, white housing	Black bezel, white housing	72
Screen orientation	Landscape	Portrait	
Power supply	230 VAC 50-60 Hz	230 VAC 50-60 Hz	
Ref.	FSMO-75HBV*	FSMO-75HBVP*	Max. "
Colour	Black bezel, white housing	Black bezel, white housing	75
Screen orientation	Landscape	Portrait	
Power supply	230 VAC 50-60 Hz	230 VAC 50-60 Hz	

* For these models refer to price list or website for brand related active ventilated monitor brackets.

OUTDOOR HOUSINGS

OUTDOOR HOUSINGS WITH AIR CONDITIONING FOR HIGH BRIGHTNESS SCREENS

Max. brightness: **1500 cd/m²****IP 65**Max. surrounding temp. **-20°C to +35°C**

Suitable for full sunlight

**Ref.**

Colour
Mounting interface
Dimensions in mm
Power consumption
Power supply
Optional

FSMO-46HB*

Black bezel, white housing
L&S 5
W 1580 x D 282 x H 830
600 Watt
230 VAC 50-60 Hz
non reflective glass bezel

Max. °
46**Ref.**

Colour
Mounting interface
Dimensions in mm
Power consumption
Power supply
Optional

FSMO-52HB*

Black bezel, white housing
L&S 5
W 1810 x D 282 x H 951
600 Watt
230 VAC 50-60 Hz
non reflective glass bezel

Max. °
52

* For these models refer to price list or website for brand related active ventilated monitor brackets.

ACCESSORIES

UNIFLATFIX PRO (UNIVERSAL FLAT PANEL BRACKETS)



Lock the bracket with the
optional lock
Ref.: 230052



Ref.
Dimensions in mm
Max. mounting range in mm
Min. mounting range in mm

UFPRO-V400
W 430 x D 6 x H 430
W 400 x H 400
W 100 x 100

UFPRO-0500
W 516 x D 32 x H 382
W 470 x H 360
W 125

UFPRO-0700
W 716 x D 32 x H 502
W 670 x H 446
W 125

UFPRO-0800
W 860 x D 32 x H 502
W 810 x H 446
W 130

UFPRO-0801
W 860 x D 39 x H 727
W 810 x H 671
W 120


Max.
85

THEFT DELAY WALL MOUNTS



Mount	FSMO	FSMO Slim-line	FSMO-HBV	FSMO-HB
P2691	40" - 70" / 42"P - 55"P	40"- 65" / 42"P - 55"P		
P5281				46"/46"P
P5502	32"	32"		
P5569	32"P	32"P		
P5620				
P5925	40"P	40"P		
P5984			46"/47"	52"/52"P
P6331	60"P - 85"P	60"P/65"P		
P6441	75"/75"P			
P7066	80" / 85"			
P7167			46"P / 47"P	

CEILING MOUNTS

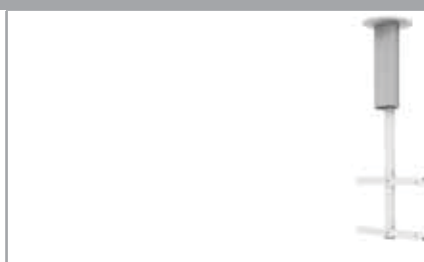

Custom ceiling mount length available on request

Ref.
Tube length

FSM-CM600
600 mm

FSM-CM1000
1000 mm

SCREEN-CRAWLER (INSTALLATION AID)

Ref. **SC-190 + SC-200** (Safety Aid for installing large, heavy screens. See page 53)