


Instructions Manual For Wireless Synchro Converter (Radio Frequency to Infrared)

Description



Wireless Synchro Converter (RF to IR) Receiver Head



Converter Unit

Usage

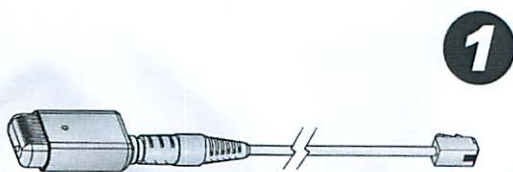


Figure 1

1. Connect the Receiver Head into the 3.5 stereo jack on the Converter Unit (Figure 1).

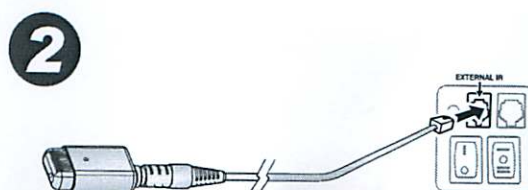


Figure 2

2. Connect the external IR insert to the " External IR " slot on the screen's control panel (Figure 2).

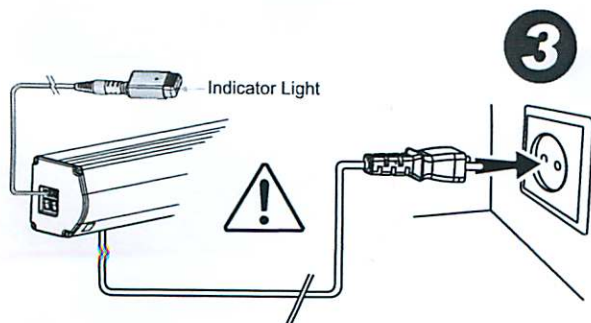


Figure 3

3. Connect the screen to its power source. Once the indicator light is on, the Wireless Synchro Converter will be ready for use (Figure 3).

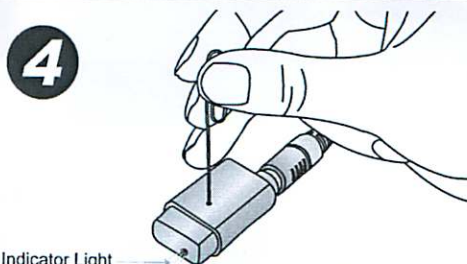


Figure 4

4. When using for the first time or synching with another device, it must first be programmed. Insert a small pin into the pin insert. With the pin inserted, press the programming button and the indicator light will flash repeatedly (Figure 4). After 60 seconds, the programming instructions will be synced to both devices and the program mode will end. Once complete, the indicator light will stop flashing and stay on.

FVS sas

13 rue du Coq Gaulois
77170 Brie Comte Robert


France

Tel: 0033(0)1 60 62 49 00
Fax: 0033(0)1 60 62 47 00

Screen'up

Instruction Manual for Power Synchro Relay

Description

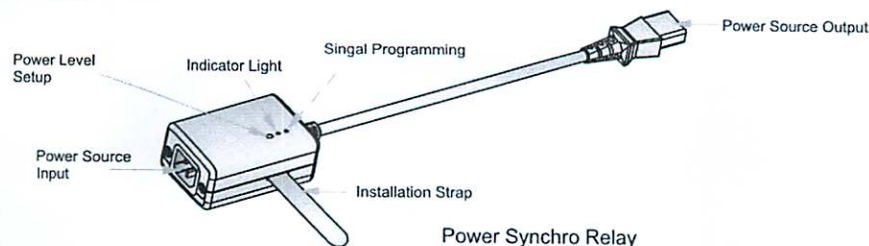

Input Voltage: 220V
Voltage Frequency : 50/60Hz
Max Input/output power : 5A
Power Input: UI817
Power Output: IEC320
Self-Power: 1W
Transmitting Power: 2.5mW
Modulation Method: FM
Transmitting Frequency : 868MHz

Directions

1



Figure 1

1. Connect power cord of projector to the power source input on the Power Synchro Relay (Figure 1).

2

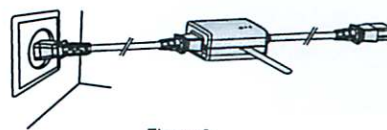


Figure 2

2. Connect the other end of the projector's power cord to the electrical socket (Figure 2). The indicator light will turn on and stay on.

3

Wireless Synchro Receiver (RF to IR)





Figure 3

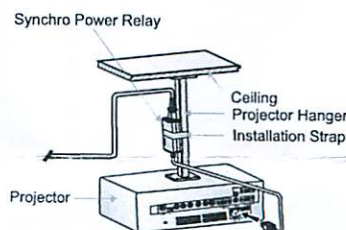

This product can only be used in Integrated Motorized Screen with "EXT CTRL" input.

4

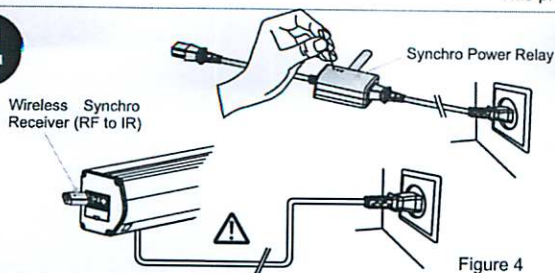


Figure 4

(Pairing is factory set. Please skip to Step 5.)

4. Ensure the wireless receiver is connected to the screen, press the receiver programming button by inserting a small plastic stick and the light will flash repeatedly (Figure 3). Then press the signal programming button (Figure 4), it means that the programming instructions will be synced to both devices, the receiver light will stop flashing and stay on once completed.

5

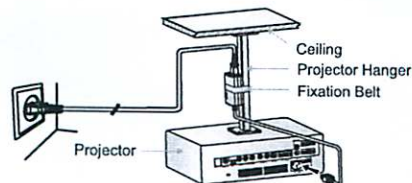


Figure 5

5. Use the installation strap to fix the Power Synchro Relay to the projector hanger (if applicable). Connect the included power source output cord into the projector.

6

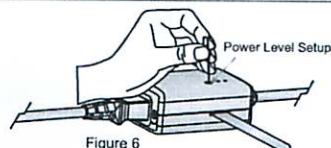


Figure 6

6. Turn on the projector, and then please press the power level setup with a small plastic stick when the LED light of projector turns on. At the time, the indicator light of Synchro Power Relay will turn on with blue-ray.

7

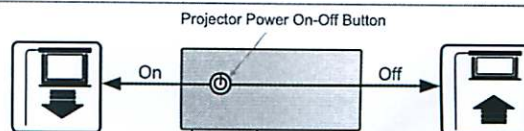


Figure 7

7. The projection screen will automatically lower when the projector is on. It will automatically retract when the projector is turned off (Figure 7).

FVS sas
13 rue du Coq Gaulois
77170 Brie Comte Robert
France
Tel: 00 33(0)1 60 62 49 00
Fax: 00 33(0)1 60 62 47 00